

Condition Monitoring as Tool of Engineering Management

Dharmender Jangra*

Department of Mechanical and Automation Engineering, Northern India Engineering College, New Delhi, India

Received 20 May 2022, Accepted 15 June 2022, Available online 22 June 2022, Vol.10 (May/June 2022 issue)

Abstract

With the increasing demand for the machinery's availability, it becomes critical to have a periodic check on the health status of the machinery. The process of periodic check consists of collection, processing and decision making. Condition monitoring is the process of periodic checks of the health of machine elements. The condition monitoring consists of two main components: diagnosis and prognosis. In the present work, the discussion on condition monitoring as a tool of engineering management was carried out.

Keywords: Management Tool, Condition Monitoring

Introduction

In today's time, goods are subjected to severe competition. The demand for environment-friendly, energy-efficient products emphasizes quality, reliability, health and safety during the design and manufacturing stage of the product [1]. The increased demand brings the engineer's attention to designing a product that can fulfil the above criteria along with good design life. In practical application, the product operates under varying stress or load and fluctuating operating conditions [2]. The product deteriorates over time, no matter how good the product is. Most engineers support that prevention is better than cure and use the previous knowledge and historical data of machinery failure to predict and eliminate the machinery failure [3–5]. Most of the maintenance work relies on the human senses. In the past, the survey reports indicate that catastrophic incidents happened because of poor maintenance [3]. In today's time, the complex system brings more interdependence among the system elements (bearings, gear, cam, shafts etc.). The failure of one element shuts the whole system down [4–6]. In the past, researchers carried many works on the tribological performance of the bearings [7,8,17–26,9,27–36,10,37–46,11,47–56,12,57,58,13–16] and gear condition monitoring [59–67]. The research shows that the failure combines technical and management decision elements (communications, supervision and organizational shortcoming) [3].

The present work focuses on using the condition monitoring tool as the engineering decision-making or engineering management tool.

2. Process of diagnosis and decision making

All the interacting mechanical elements are prone to degradation over time [41,66]. The mechanical failures are classified as lubricated (pitting, wear etc.) and non-lubricated or strength-related failures [4]. The failures need to be avoided or prevented for the longer service life of the component, so the following parameters are considered before designing a component:

- A) Type of motion (kinematics of the system)
- B) Pseudo-static (assumed at the state of rest) and dynamics- force, displacement
- C) Material, surface characteristics, and lubricant (physical and chemical)
- D) Working conditions

All these parameters together combined to explain a failure mechanism. All forms of failure are time-dependent phenomena. The geometry provides information on relative contact and velocities; kinematics defines the set of motion at the contact, and contact defines the load sharing. Each component in a system is interdependent for the proper working of the component.

Analyzing these factors brings more complexities to system equations [68]. The non-linear behaviour is due to engagement, profile modification, manufacturing errors, and externally imposed conditions [69–71].

*Corresponding author's ORCID ID: 0000-0000-0000-0000
DOI: <https://doi.org/10.14741/ijmcr/v.10.3.4>

The diagnosis of a system consists of three main steps.




Fig. 1 Diagnosis steps [5]

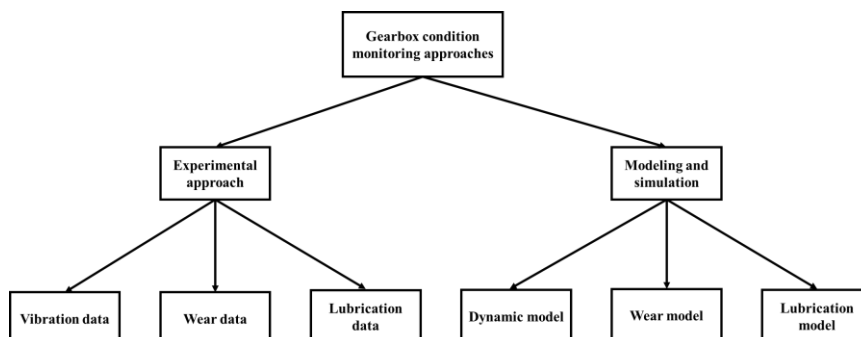


Fig. 2 Gearbox condition monitoring approaches

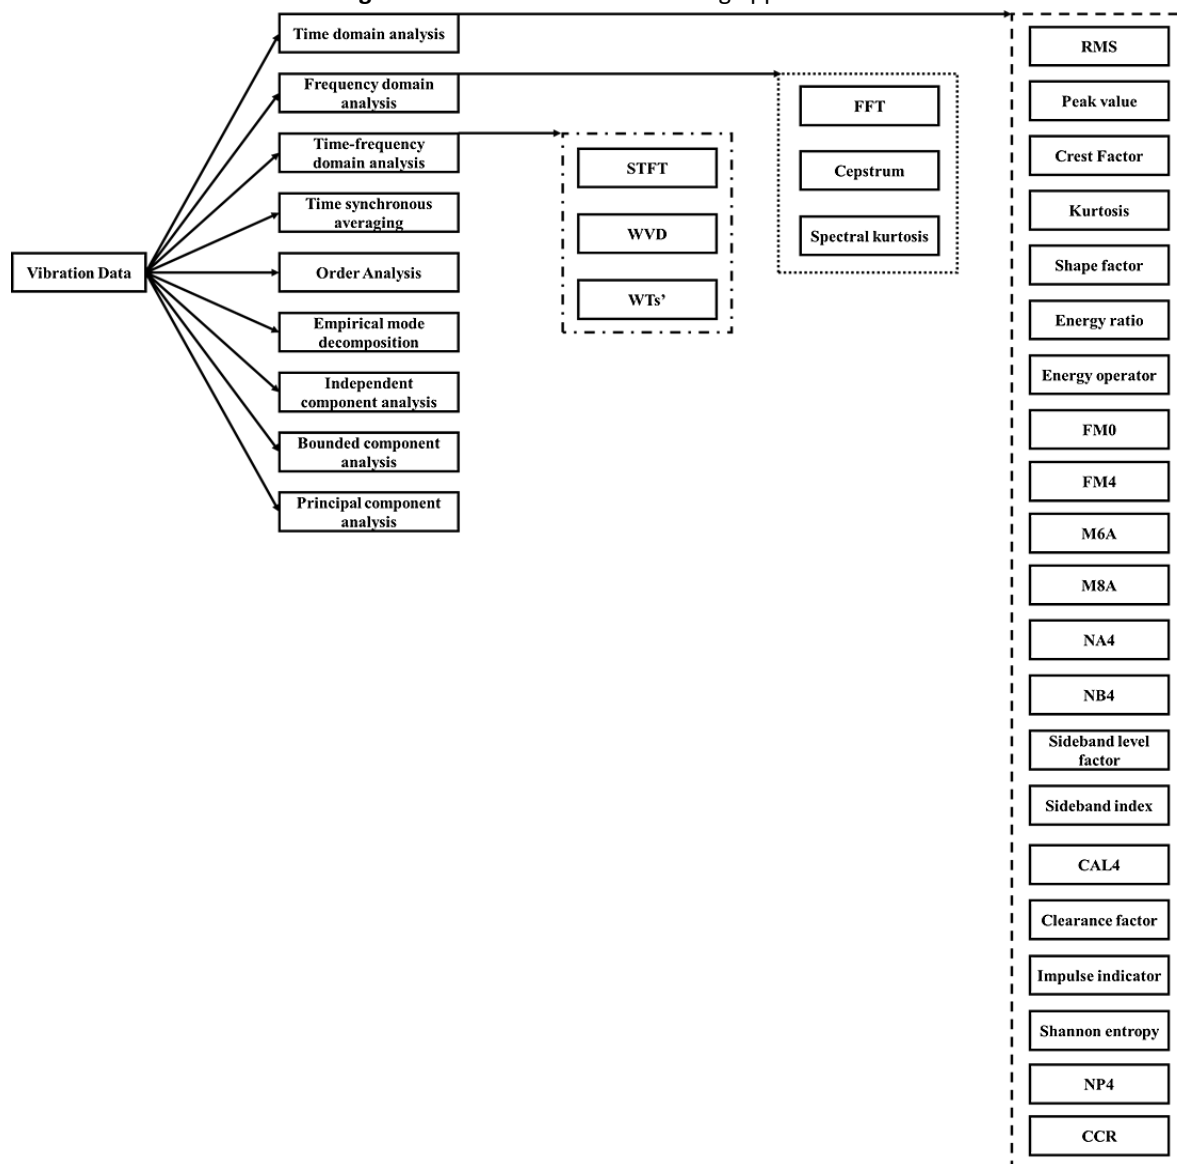


Fig 3 Gearbox faults assessment based on vibration parameters analysis

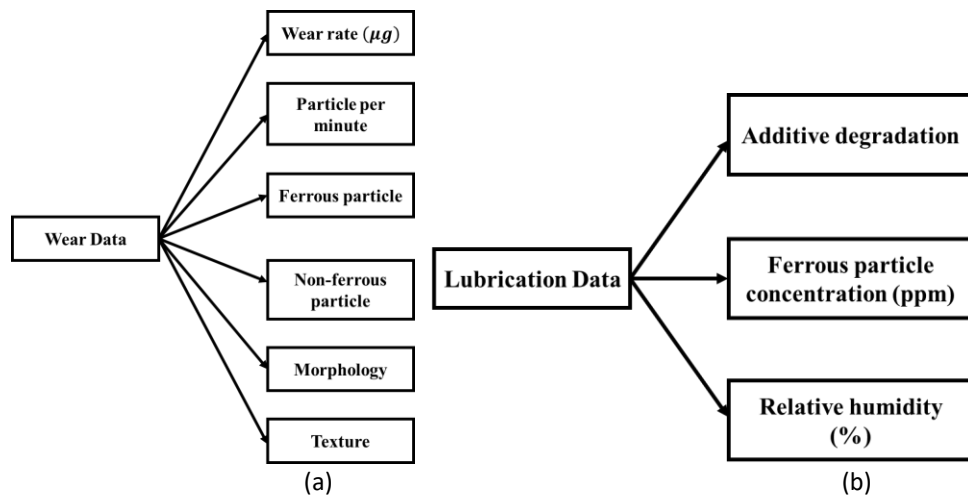


Fig. 4 Gearbox faults assessment based on tribological analysis (a) Wear data analysis, (b) Lubricant oil data analysis

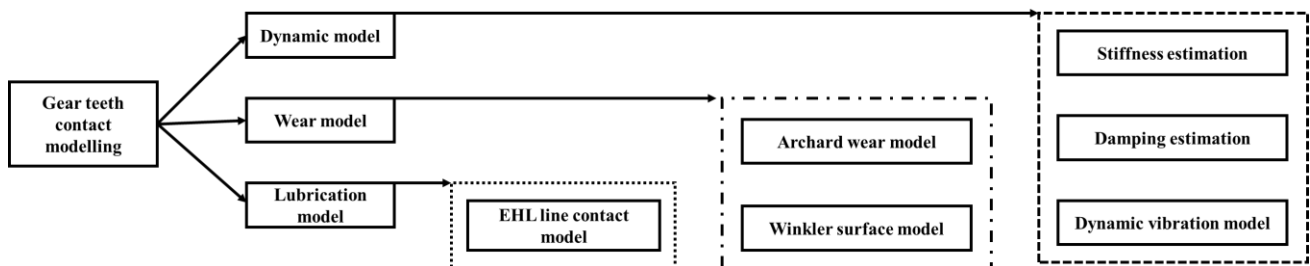


Fig. 5 Gear teeth contact modelling

The data is processed to take the preventive decision. Let's take the case study of the gearbox fault diagnosis. Diagnosing the gearbox faults is a two-way process: experimental and modelling. Further, these are divided into different data types like vibration data, wear debris data, lubrication (quality) data etc. These data can be collected from the running gearbox by connecting suitable sensing devices. The modelling is a function of all affecting parameters like forces acting, velocities and displacements, properties of the interacting surfaces etc. Figure 2 depicts the different gearbox condition monitoring approaches; Figure 3 depicts the vibration-based fault indicators and the denoising techniques. Figure 4 (a) and Figure 4 (b) depict the wear debris analysis and the lubricating oil analysis. Figure 5 depicts the gear modelling based on the vibration, wear and lubrication effects.

The failure of the gearbox has to be prevented the increasing the overall life of the gearbox.

In the same way, a systematic approach is used to identify all the possible system parameters to get complete information and failure possibilities of the system. Then these parameters and existing monitoring tools are integrated into the system's design.

3. Condition monitoring as engineering management

Every physical system or element is prone to be degraded with time. So, it is crucial to have a check on the current health status of the system. Condition monitoring is the

process of keeping the check on the health state of the system and, based on that state, deciding on the maintenance actions. The maintenance techniques are either time-dependent or time-independent. Preventive maintenance and condition-based maintenance (CBM) is time-dependent techniques. The breakdown maintenance is a time-independent technique. The breakdown maintenance is also called run to failure maintenance because it can only be implemented at the system's breakdown. In preventive maintenance, the maintenance is carried out on a periodic time interval basis, irrespective of the system's health status. Breakdown maintenance and preventive maintenance are not cost-effective, as the demand for reliability, availability and quality increases the maintenance cost. The solution to the problem is CBM. The information collected during the condition monitoring is used to make maintenance decisions. The CBM has two essential aspects diagnostics and prognostics.

In diagnostic, the detection (to indicate whether something is wrong in the system), isolation (locate the element or component) and identification (the nature and type of fault)[72]. In prognostic predict useful life of the component under specific conditions based on prior system history. Prognostics is a probability-based approach. The difference between diagnostics and prognostics is one post-event analysis and another preliminary event analysis. Diagnostics came into the picture when the prognosis prediction failed [3,5].

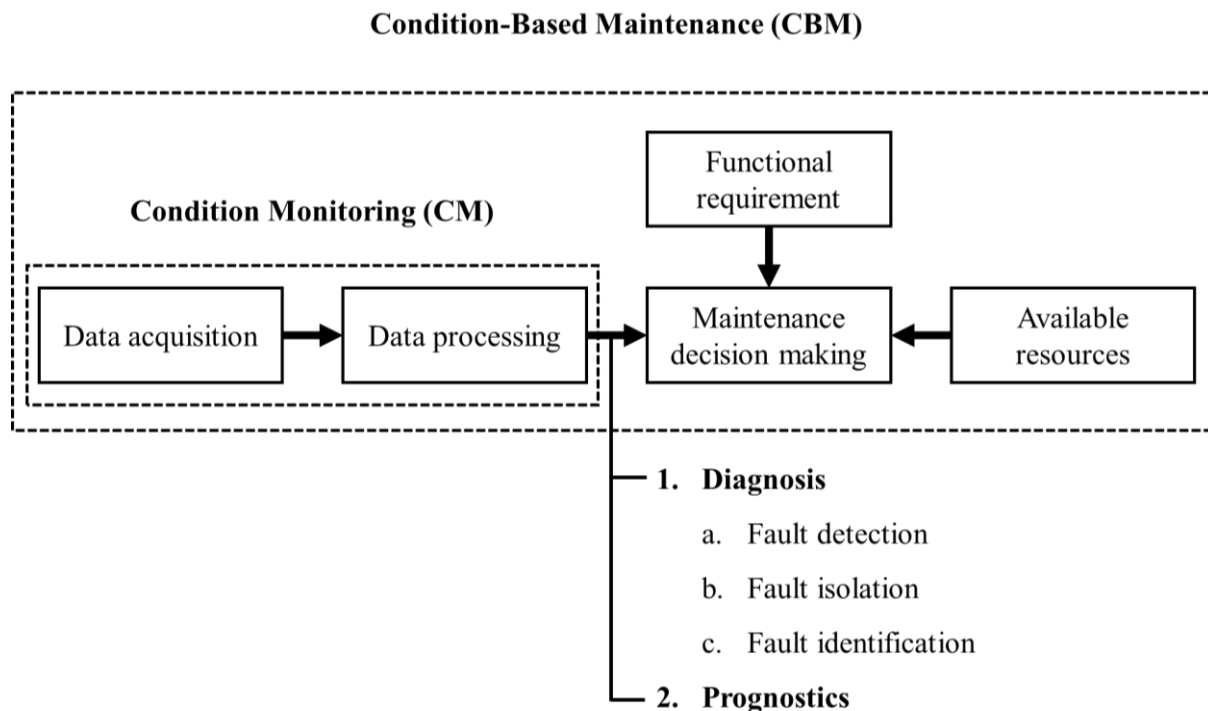


Fig. 6 Condition-based maintenance (CBM) Process [73]

Conclusions

The above discussion on the maintenance strategies shows that one should need to take a maintenance decision. To take such a decision, one needs to understand and better predict the system's behaviour in real-time. The collected information from the maintenance activities needs to be controlled, and proper execution to achieve quality, reliability and availability of the system is optimised depending upon the decision-makers managerial quality. So, condition monitoring is an engineering management tool for the system's availability.

References

- [1] Syta, A., Jonak, J., Jedliński, Ł., and Litak, G., 2012, "Failure Diagnosis of a Gear Box by Recurrences," *J. Vib. Acoust.*, **134**(4), p. 041006.
- [2] Bartelmus, W., 2011, "Gearbox Damage Process," *J. Phys. Conf. Ser.*, **305**(1).
- [3] Davies, A., 1998, *Handbook of Condition Monitoring*, Springer-science+ Business Media, B.V.
- [4] Davis, J. R., 2005, *Gear Materials, Properties, and Manufacture*, ASM International.
- [5] Jardine, A. K. S., Lin, D., and Banjevic, D., 2006, "A Review on Machinery Diagnostics and Prognostics Implementing Condition-Based Maintenance," *Mech. Syst. Signal Process.*, **20**(7), pp. 1483–1510.
- [6] Liang, X., Zuo, M. J., and Feng, Z., 2018, "Dynamic Modeling of Gearbox Faults: A Review," *Mech. Syst. Signal Process.*, **98**, pp. 852–876.
- [7] Sukhwani, V. K., Lakshmi, V., & Hirani, H., 2006, "Performance Evaluation of MR Brake: An Experimental Study," *Indian J. Tribol.*, **1**, pp. 47–52.
- [8] Talluri, S. K., & Hirani, H., 2003, "Parameter Optimization Of Journal Bearing Using Genetic Algorithm," *Indian J. Tribol.*, **2**(1–2), pp. 7–21.
- [9] Sukhwani, V. K., Hirani, H., & Singh, T., 2007, "Synthesis and Performance Evaluation of Magnetorheological (MR) Grease," 74th NLGI Annu. Meet. Scottsdale, Arizona, USA.
- [10] Sukhwani, V. K., Hirani, H., & Singh, T., 2007, "Synthesis of Magnetorheological Grease," *Greasetech India*.
- [11] Sukhwani, V. K., Hirani, H., & Singh, T., 2008, "Synthesis and Performance Evaluation of Magnetorheological (MR) Grease," *NLGI, Natl. Lubr. Grease Inst.*, **71**(10), pp. 10–21.
- [12] Hirani, H., & Dani, S., 2005, "Variable Valve Actuation Mechanism Using Magnetorheological Fluid," *World Tribol. Congr.*, **42029**, pp. 569–570.
- [13] Shankar, M., Sandeep, S., & Hirani, H., 2006, "Active Magnetic Bearing," *Indian J. Tribol.*, **1**, pp. 15–25.
- [14] Hirani, H., 2014, "Wear Mechanisms."
- [15] Hirani, H., Athre, K., & Biswas, S., 2000, "Transient Trajectory of Journal in Hydodynamic Bearing," *Appl. Mech. Eng.*, **5**(2), pp. 405–418.
- [16] Sukhwani, V. K., Hirani, H., & Singh, T., 2009, "Performance Evaluation of a Magnetorheological Grease Brake," *Greasetech India*, **9**(4), pp. 5–11.
- [17] Sarkar, C., and Hirani, H., 2015, "Synthesis and Characterization of Nano-Particles Based Magnetorheological Fluids for Brake," *Tribol. Online*, **10**(4), pp. 282–294.
- [18] Lijesh, K. P., and Hirani, H., 2015, "Modeling and Development of RMD Configuration Magnetic Bearing," *Tribol. Ind.*, **37**(2), pp. 225–235.
- [19] Goilkar, S. S., and Hirani, H., 2010, "Parametric Study on Balance Ratio of Mechanical Face Seal in Steam Environment," *Tribol. Int.*, **43**(5–6), pp. 1180–1185.
- [20] Hirani, H., Athre, K., and Biswas, S., 2001, "A Simplified Mass Conserving Algorithm for Journal Bearing under Large Dynamic Loads," *Int. J. Rotating Mach.*, **7**(1), pp. 41–51.
- [21] Sarkar, C., and Hirani, H., 2015, "Synthesis and Characterisation of Nano Silver Particle-Based

- Magnetorheological Fluids for Brakes," *Def. Sci. J.*, **65**(3), pp. 252–258.
- [22] Muzakkir, S. M., Hirani, H., and Thakre, G. D., 2013, "Lubricant for Heavily Loaded Slow-Speed Journal Bearing," *Tribol. Trans.*, **56**(6), pp. 1060–1068.
- [23] Hirani, H., and Manjunatha, C. S., 2007, "Performance Evaluation of a Magnetorheological Fluid Variable Valve," *Proc. Inst. Mech. Eng. Part D J. Automob. Eng.*, **221**(1), pp. 83–93.
- [24] Lijesh, K. P., Muzakkir, S. M., and Hirani, H., 2015, "Experimental Tribological Performance Evaluation of Nano Lubricant Using Multi-Walled Carbon Nano-Tubes (MWCNT)," *Int. J. Appl. Eng. Res.*, **10**(6), pp. 14543–14550.
- [25] Ghosh, K., Mazumder, S., Hirani, H., Roy, P., and Mandal, N., 2021, "Enhancement of Dry Sliding Tribological Characteristics of Perforated Zirconia Toughened Alumina Ceramic Composite Filled with Nano MoS₂ in High Vacuum," *J. Tribol.*, **143**(6), pp. 1–9.
- [26] Hirani, H., Athre, K., and Biswas, S., 1998, "Rapid and Globally Convergent Method for Dynamically Loaded Journal Bearing Design," *Proc. Inst. Mech. Eng. Part J J. Eng. Tribol.*, **212**(3), pp. 207–213.
- [27] Hirani, H., 2009, "Root Cause Failure Analysis of Outer Ring Fracture of Four-Row Cylindrical Roller Bearing," *Tribol. Trans.*, **52**(2), pp. 180–190.
- [28] Lijesh, K. P., Muzakkir, S. M., Hirani, H., and Thakre, G. D., 2016, "Control on Wear of Journal Bearing Operating in Mixed Lubrication Regime Using Grooving Arrangements," *Ind. Lubr. Tribol.*, **68**(4), pp. 458–465.
- [29] Lijesh, K. P., and Hirani, H., 2015, "Magnetic Bearing Using Rotation Magnetized Direction Configuration," *J. Tribol.*, **137**(4), pp. 1–11.
- [30] Hirani, H., 2005, "Multiobjective Optimization of Journal Bearing Using Mass Conserving and Genetic Algorithms," *Proc. Inst. Mech. Eng. Part J J. Eng. Tribol.*, **219**(3), pp. 235–248.
- [31] Goilkar, S. S., and Hirani, H., 2009, "Design and Development of a Test Setup for Online Wear Monitoring of Mechanical Face Seals Using a Torque Sensor," *Tribol. Trans.*, **52**(1), pp. 47–58.
- [32] Hirani, H., and Goilkar, S. S., 2011, "Rotordynamic Analysis of Carbon Graphite Seals of a Steam Rotary Joint," *IUTAM Bookseries*, **25**, pp. 253–262.
- [33] Hirani, H., and Rao, T. V. V. L. N., 2003, "Optimization of Journal Bearing Groove Geometry Using Genetic Algorithm," *NaCoMM03*, IIT Delhi, India, **1**, pp. 1–9.
- [34] Ghosh, K., Mazumder, S., Kumar Singh, B., Hirani, H., Roy, P., and Mandal, N., 2020, "Tribological Property Investigation of Self-Lubricating Molybdenum-Based Zirconia Ceramic Composite Operational at Elevated Temperature," *J. Tribol.*, **142**(2), pp. 1–8.
- [35] Lijesh, K. P., Kumar, D., and Hirani, H., 2017, "Effect of Disc Hardness on MR Brake Performance," *Eng. Fail. Anal.*, **74**, pp. 228–238.
- [36] Lijesh, K. P., and Hirani, H., 2016, "Failure Mode and Effect Analysis of Active Magnetic Bearings," *Tribol. Ind.*, **38**(1), pp. 90–101.
- [37] Athre, K., and Biswas, S., 2000, "A Hybrid Solution Scheme for Performance Evaluation of Crankshaft Bearings," *J. Tribol.*, **122**(4), pp. 733–740.
- [38] Lijesh, K. P., Kumar, D., and Hirani, H., 2017, "Synthesis and Field Dependent Shear Stress Evaluation of Stable MR Fluid for Brake Application," *Ind. Lubr. Tribol.*, **69**(5), pp. 655–665.
- [39] Sarkar, C., and Hirani, H., 2017, "Experimental Studies on Magnetorheological Brake Containing Plane, Holed and Slotted Discs," *Ind. Lubr. Tribol.*, **69**(2), pp. 116–122.
- [40] Hirani, H., Athre, K., and Biswas, S., 1999, "Dynamic Analysis of Engine Bearings," *Int. J. Rotating Mach.*, **5**(4), pp. 283–293.
- [41] Lijesh, K. P., Muzakkir, S. M., and Hirani, H., 2016, "Failure Mode and Effect Analysis of Passive Magnetic Bearing," *Eng. Fail. Anal.*, **62**, pp. 1–20.
- [42] Lijesh, K. P., Kumar, D., Muzakkir, S. M., and Hirani, H., 2018, "Thermal and Frictional Performance Evaluation of Nano Lubricant with Multi Wall Carbon Nano Tubes (MWCNTs) as Nano-Additive," *AIP Conf. Proc.*, **1953**(May), pp. 1–6.
- [43] Lijesh, K. P., and Hirani, H., 2017, "Design and Development of Permanent Magneto-Hydrodynamic Hybrid Journal Bearing," *J. Tribol.*, **139**(4), pp. 1–9.
- [44] Burla, R. K., Seshu, P., Hirani, H., Sajanpawar, P. R., and Suresh, H. S., 2003, "Three Dimensional Finite Element Analysis of Crankshaft Torsional Vibrations Using Parametric Modeling Techniques," *SAE Tech. Pap.*, **112**, pp. 2330–2337.
- [45] Hirani, H., Athre, K., and Biswas, S., 2000, "Comprehensive Design Methodology for an Engine Journal Bearing," *Proc. Inst. Mech. Eng. Part J J. Eng. Tribol.*, **214**(4), pp. 401–412.
- [46] Gupta, S., and Hirani, H., 2011, "Optimization of Magnetorheological Brake," *Am. Soc. Mech. Eng. Tribol. Div. TRIB*, pp. 405–406.
- [47] Hirani, H., Athre, K., and Biswas, S., 2001, "Lubricant Shear Thinning Analysis of Engine Journal Bearings," *Tribol. Trans.*, **44**(1), pp. 125–131.
- [48] Muzakkir, S. M., Lijesh, K. P., and Hirani, H., 2016, "Influence of Surfactants on Tribological Behaviors of MWCNTs (Multi-Walled Carbon Nano-Tubes)," *Tribol. - Mater. Surfaces Interfaces*, **10**(2), pp. 74–81.
- [49] Lijesh, K. P., and Hirani, H., 2015, "Design of Eight Pole Radial Active Magnetic Bearing Using Monotonicity," *9th Int. Conf. Ind. Inf. Syst. ICIS 2014*.
- [50] Kumar, P., Hirani, H., and Agrawal, A., 2015, "Scuffing Behaviour of EN31 Steel under Dry Sliding Condition Using Pin-on-Disc Machine," *Mater. Today Proc.*, **2**(4–5), pp. 3446–3452.
- [51] Lijesh, K. P., and Hirani, H., 2015, "Design and Development of Halbach Electromagnet for Active Magnetic Bearing," *Prog. Electromagn. Res. C*, **56**(January), pp. 173–181.
- [52] Lijesh, K. P., Muzakkir, S. M., and Hirani, H., 2016, "Rheological Measurement of Redispersibility and Settling to Analyze the Effect of Surfactants on MR Particles," *Tribol. - Mater. Surfaces Interfaces*, **10**(1), pp. 53–62.
- [53] Sukhwani, V. K., and Hirani, H., 2007, "Synthesis and Characterization of Low Cost Magnetorheological (MR) Fluids," *Behav. Mech. Multifunct. Compos. Mater.* 2007, **6526**, p. 65262R.
- [54] Samanta, P., and Hirani, H., 2008, "An Overview of Passive Magnetic Bearings," *Proc. STLE/ASME Int. Jt. Tribol. Conf.*, pp. 1–3.
- [55] Goilkar, S. S., and Hirani, H., 2009, "Tribological Characterization of Carbon Graphite Secondary Seal," *Indian J. Tribol.*, **4**(2), pp. 1–6.
- [56] Samanta, P., and Hirani, H., 2007, "A Simplified Optimization Approach for Permanent Magnetic Journal Bearing," *Indian J. Tribol.*, **2**(2), pp. 23–28.
- [57] Samanta, P., Hirani, H., Mitra, A., Kulkarni, A. M., and Fernandes, B. G., 2005, "Test Setup for Magneto Hydrodynamic Journal Bearing," *NaCoMM*, pp. 298–303.
- [58] Hirani, H., 2016, *Fundamental of Engineering Tribology with Applications*.
- [59] Kumar, P., Hirani, H., and Agrawal, A. K., 2018, "Online Condition Monitoring of Misaligned Meshing Gears Using Wear

- Debris and Oil Quality Sensors," *Ind. Lubr. Tribol.*, **70**(4), pp. 645–655.
- [60] Shah, H., and Hirani, H., 2014, "Online Condition Monitoring of Spur Gears," *Int. J. Cond. Monit.*, **4**(1), pp. 15–22.
- [61] Hirani, H., 2009, "Online Wear Monitoring of Spur Gears," *Indian J. Tribol.*, **4**(2), pp. 38–43.
- [62] Hirani, H., 2012, "Online Condition Monitoring of High Speed Gears Using Vibration and Oil Analyses," *Therm. fluid Manuf. Sci. Narosa Publ. House*, pp. 21–28.
- [63] Kumar, P., Hirani, H., and Agrawal, A., 2017, "Fatigue Failure Prediction in Spur Gear Pair Using AGMA Approach," *Mater. Today Proc.*, **4**(2), pp. 2470–2477.
- [64] Kumar, P., Hirani, H., and Agrawal, A. K., 2019, "Modeling and Simulation of Mild Wear of Spur Gear Considering Radial Misalignment," *Iran. J. Sci. Technol. - Trans. Mech. Eng.*, **43**(s1), pp. 107–116.
- [65] Kumar, P., Hirani, H., and Kumar Agrawal, A., 2019, "Effect of Gear Misalignment on Contact Area: Theoretical and Experimental Studies," *Meas. J. Int. Meas. Confed.*, **132**, pp. 359–368.
- [66] Dharmender, Darpe, A. K., and Hirani, H., 2020, *Classification of Stages of Wear in Spur Gears Based on Wear Debris Morphology*.
- [67] Kumar, A., Antil, S. K., Rani, V., Antil, P., and Jangra, D., 2020, "Characterization on Physical , Mechanical , and Morphological Properties of Indian Wheat Crop," pp. 1–18.
- [68] Spitas, V., Costopoulos, T., and Spitas, C., 2007, "Fast Modeling of Conjugate Gear Tooth Profiles Using Discrete Presentation by Involute Segments," *Mech. Mach. Theory*, **42**(6), pp. 751–762.
- [69] Khabou, M. T., Bouchaala, N., Chaari, F., Fakhfakh, T., and Haddar, M., 2011, "Study of a Spur Gear Dynamic Behavior in Transient Regime," *Mech. Syst. Signal Process.*, **25**(8), pp. 3089–3101.
- [70] Eritenel, T., and Parker, R. G., 2012, "Three-Dimensional Nonlinear Vibration of Gear Pairs," *J. Sound Vib.*, **331**(15), pp. 3628–3648.
- [71] Guerine, A., El Hami, A., Walha, L., Fakhfakh, T., and Haddar, M., 2016, "Dynamic Response of a Spur Gear System with Uncertain Parameters," *J. Theor. Appl. Mech.*, **0**, p. 1039.
- [72] Begg, C. D., Byington, C. S., and Maynard, K. P., 2000, "Dynamic Simulation of Mechanical Fault Transition," *Proc. 54th Meet. Soc. Mach. Fail. Prev. Technol. Virginia Beach, VA*, pp. 203–212.
- [73] Mohammed, O. D., 2015, *Dynamic Modelling and Vibration Analysis for Gear Tooth Crack Detection*.